



InsulGrip® Plates

Description

- InsulGrip Plates are 4" x 4", 20 gauge G-60 galvanized steel plates that include multiple 1/2" barbs in two planes.

Uses

- The InsulGrip Plates are designed to facilitate the placement of InsulFoam GF (Geofoam) blocks where multiple layers are to be installed and the movement between blocks must be minimized.

Advantages


- User Friendly.** The InsulGrip Plates are compact, lightweight and easy to install. In addition, unlike alternate adhesives, InsulGrip Plates present no significant challenges during installation when inclement weather exists.
- Cost Effective.** The InsulGrip Plates are typically less expensive than other attachment methods.
- Durable & Strong.** The InsulGrip Plates are manufactured with 1/2" barbs that enable each plate to typically provide 60 lbs. of lateral load resistance.

Sizes

- The InsulGrip Plates are available with nominal 4" x 4" dimensions and a 20 gauge thickness.

Installation Recommendations

- Place InsulGrip Plates as directed or shown on the plans or specifications.
- A minimum of one plate per 16 sq. ft. is recommended.
- Place InsulGrip Plates firmly into the InsulFoam GF blocks and follow with the succeeding layers of InsulFoam GF.

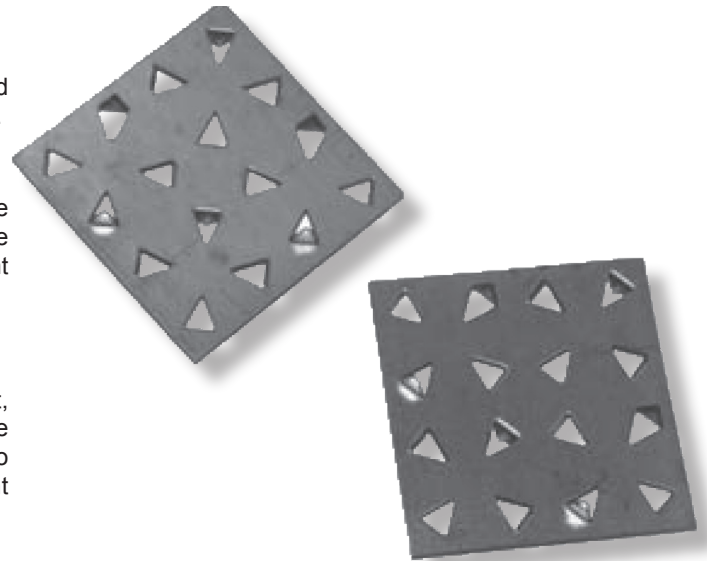

INSULFOAM - CORPORATE OFFICE
6004 N. WESTGATE BLVD.
SUITE 120
TACOMA, WA 98406
PHONE: (253) 572-5111
TOLL FREE: (800) 248-5995

NICO SUTMÖLLER
GEOFOAM SPECIALIST
618-446-5776
EMAIL: GEOFOAM@INSULFOAM.COM

OTHER INSULFOAM LOCATIONS

ANCHORAGE, AK SALT LAKE CITY, UT
PHOENIX, AZ MIAMI, FL
DALLAS, TX MEMPHIS, TN
EDMONT, CA LAS VEGAS, NV
AUSTIN, TX LANGLAND, FL

We warrant that the material and workmanship of the products we sell are of the highest quality and that they will meet the requirements of the specifications and standards of the industry. We do not warrant the performance of the products when used in applications not intended by the manufacturer. The user assumes all liability for the use of the products in any application not intended by the manufacturer. The user assumes all liability for the use of the products in any application not intended by the manufacturer.

InsulFoam Systems
EXPANDED POLYSTYRENE
EPSX PER ASTM D6817 SPECS

PROJECT TITLE
UNKNOWN
UNKNOWN

CONTRACTOR
TBD
TBD

DRAWN BY: ---
DATE: ---
SCALE: ---
FILENAME: ---

SHEET NO
1 OF 1

Suggested Fastening Patterns for InsulFoam GF Blocks

Insulfoam LLC
ENGINEERED EPS
Versatile - Durable - Recyclable

www.insulfoam.com

6004 N. Westgate, Suite 120 • Tacoma, WA 98406 • USA
Phone: 253.572.5111 • Toll Free: 800.248.5995